

# BYU Daily Browse Images of SeaWinds Sigma0 Measurements (D. Long)



10 April 2003, average sigma0, horizontal polarization, global

## Summary:

The SeaWinds on ADEOS-II (Midori-II) scatterometer provides normalized radar cross section ( $\sigma_0$ ) measurements of the Earth's surface. While originally designed for wind observation, scatterometers have proven useful in a variety of land and ice studies. To aid in the selection of regions and time periods for study, Brigham Young University has produced this global  $\sigma_0$  browse product. This product consists of spatial and temporal averages of SeaWinds Level 1B  $\sigma_0$  values over a one-day period.

## Table of Contents:

- [1 Data Set Overview](#)
- [2 Investigator\(s\)](#)
- [3 Theory of Measurements](#)
- [4 Equipment](#)
- [5 Data Acquisition Methods](#)
- [6 Observations](#)
- [7 Data Description](#)
- [8 Data Organization](#)
- [9 Data Manipulations](#)
- [10 Errors](#)
- [11 Notes](#)
- [12 Application of the Data Set](#)
- [13 Future Modifications and Plans](#)
- [14 Software](#)
- [15 Data Access](#)
- [16 Output Products and Availability](#)
- [17 References](#)
- [18 Glossary of Terms](#)
- [19 List of Acronyms](#)

- [20 Document Information](#)

## 1. Data Set Overview:

### Data Set Identification:

BYU Daily Browse Images of SeaWinds Sigma0 Measurements (D. Long).  
JPL PO.DAAC Product 123

### Data Set Introduction:

Though the mission was cut short by the loss of the host spacecraft, NSCAT was an unqualified success. In addition to advances from its primary wind observation mission, NSCAT data has also had an impact on a variety of polar ice and tropical vegetation studies. In particular, NSCAT data very effectively maps the extent of sea ice. It is clear that scatterometers can continue to play an increasingly important role in monitoring tropical vegetation and polar ice in the future.

The SeaWinds scatterometers followed-up/replaced NSCAT. SeaWinds makes dual polarization measurements of the normalized radar cross section ( $\sigma_0$ ) at both vertical and horizontal polarization. The first SeaWinds scatterometer, on the QuikSCAT satellite, has measured the near-surface ocean wind field with unprecedented coverage and resolution since July 1999. The second SeaWinds scatterometer, on the ADEOS-II satellite, flew for less than a year before the host spacecraft was lost on 24 October 2003.

The SeaWinds on QuikSCAT Sigma0 Browse product is JPL PO.DAAC [product 121](#). This document describes the SeaWinds on ADEOS-II Sigma0 Browse product. In this document "SeaWinds" refers to SeaWinds on ADEOS-II, while "QuikSCAT" or "SeaWinds on QuikSCAT" refers to the other scatterometer.

Note that the QuikSCAT and SeaWinds Sigma0 Browse products can be combined to produce a "tandem mission" Sigma0 Browse product, which has complete daily coverage. The C software utility `tandemize.c` (see [Software](#)) is provided to facilitate this.

This dataset consists of  $\sigma_0$  browse images for three regions:

1. the entire globe,
2. the northern hemisphere, and
3. the southern hemisphere.

See [Data Description](#) for examples. The global images are rectangular lat/lon grids covering the entire globe with a resolution of 5 pixels/deg, or about 22.5 km/pixel at the equator. It well suits mid-latitude regions but distorts polar regions. Hence, separate hemispheric products are created, well-suited for high-latitude regions. Those images are polar stereographic projections using a 70° reference latitude with a nominal grid size of about 22.5 km. The polar views include only measurements above a high latitude cutoff of 52°

### Objective/Purpose:

The  $\sigma_0$  browse products are intended to help users identify features of interest directly in the SeaWinds  $\sigma_0$  measurements by providing a spatial and temporal (over one day) average view of the SeaWinds  $\sigma_0$  measurements. The resulting images can be used to identify areas of potential interest over land, ice, and ocean.

## Summary of Parameters:

One browse image, stored in its own file, is produced per day for each combination of:

- 3 regions: global, north, and south
- 2 polarizations: horizontal and vertical
- 3 image types: average, standard deviation, and count

[Data Description](#) has examples for each combination.

## Discussion:

The sigma0 browse products are produced from SeaWinds L1B data. Only egg measurements flagged as "usable" in the L1B files are utilized. Overlapping swaths are averaged.

The L1B files report measurements in two forms, *eggs* and *slices*, which differ in their spatial sizes and shapes. The nominal instantaneous SeaWinds antenna footprint is an ellipse. However, the on-board range-doppler processing incorporated in the instruments improves the resolution. Using the on-board processor, 12 individual measurements are obtained for each footprint, though only 8 are reported in the L1B data product. These individual measurements are *slices*. The slices are typically 6 km long (depending on the instrument mode and antenna beam) by 25 km wide. The summed measurements of the 8 center slices are *egg* measurements and are reported in the standard L1B product. The effective resolution of the egg measurement nearly matches the elliptical 3 dB antenna footprint (approximately 15 km by 25 km depending on the antenna beam and instrument mode). Although lower in resolution, the egg measurements have smaller measurement variance ( $Kp^2$ ) than slice measurements and are also less sensitive to calibration errors. For this reason the browse product defined here is based on the egg measurements.

To produce the browse images, the center of each L1B egg measurement is located. The measurement is averaged into the image grid element (pixel) in which the center of the measurement falls, i.e. the measurements are gridded into earth-located pixels based on their location. The effective resolution of the image products is less than the pixel resolution, or approximately 55-60 km at the equator. The resulting images are temporal averages over a one-day period of all the sigma0 measurements whose centers fall within each image pixel area. We note that using slice sigma0 measurements rather than egg sigma0 would improve the effective resolution somewhat, though not significantly.

While NSCAT made sigma0 measurements over a broad range of incidence angles, SeaWinds makes measurements at each of two nominal incidence angles, 46° and 54.1°, corresponding to the inner and outer beams. The inner beam measurement is horizontal-polarization while the outer beam is vertical. Since it is undesirable to combine measurements from different polarizations, measurements from each beam are kept separate. We note that the variation in incidence angle over an orbit is small, typically less than a few tenths of a degree. For this reason, the incidence angle variation is not considered in this browse product.

The browse image products are stored in the BYU Microwave Earth Remote Sensing (MERS) [SIR file format](#). The file format includes a header which contains location transformation information. In addition to the SIR files, the [PO.DAAC FTP](#) site also contains GIF images of some of the SIR files, namely the average sigma0 measurements.

## Related Data Sets:

The Scatterometry Climate Record Pathfinder (SCP), <http://scp.byu.edu>, at Brigham Young University is the source of this and other data sets available at PO.DAAC:

- BYU Daily Browse Images of QuikSCAT Sigma-0 Measurements (D. Long)  
JPL PO.DAAC Product 121

- BYU High Resolution Images of SEASAT Sigma0 Measurements (D. Long)  
JPL PO.DAAC Product 175
- BYU High Resolution Images of NSCAT Sigma0 Measurements (D. Long)  
JPL PO.DAAC Product 176
- BYU High Resolution Images of ERS Sigma0 Measurements (D. Long)  
JPL PO.DAAC Product 177

The SeaWinds L1B data set is available only to selected researchers. However, the following related data sets are available at JPL's [PO.DAAC](#):

- SeaWinds on ADEOS-II Level 3 Daily, Gridded Ocean Wind Vectors  
JPL PO.DAAC Product 142
- SeaWinds on ADEOS-II Level 2B Ocean Wind Vectors in 25km Swath.  
JPL PO.DAAC Product 141
- SeaWinds on QuikSCAT Level 3 Daily, Gridded Ocean Wind Vectors  
JPL PO.DAAC Product 109
- SeaWinds on QuikSCAT Level 2B Ocean Wind Vectors in 25 Km Swath.  
JPL PO.DAAC Product 108
- NSCAT Scatterometer Ocean Wind Products CD-ROM (JPL).  
JPL PO.DAAC Product 085
- NSCAT scatterometer global 25km Sigma0 and Ocean Winds (Dunbar).  
JPL PO.DAAC Product 084
- NSCAT Scatterometer Science Product, Levels 1.7, 2, 3 (JPL).  
JPL PO.DAAC Product 066

## 2. Investigator(s):

**Investigator:** Dr. David G. Long

**Title:** Director, [BYU Center for Remote Sensing](#)  
Professor, [Department of Electrical & Computer Engineering](#)

**Address:** 459 Clyde Building  
Brigham Young University  
Provo, UT 84602

**Email:** [long@ee.byu.edu](mailto:long@ee.byu.edu)

**Fax:** (801)378-6586

## 3. Theory of Measurements:

"Spaceborne scatterometers transmit microwave pulses to the ocean surface and measure the backscattered power received at the instrument. The atmospheric motions themselves do not substantially affect the radiation emitted and received by the radar." [Dunbar et al, 2003]

In addition to its primary wind observation mission, NSCAT has also had an impact on a variety of polar ice and tropical vegetation studies [Long and Drinkwater, 1999]. It is clear that scatterometers will continue to play an increasingly important role in monitoring tropical vegetation and polar ice in the future.

## 4. Equipment:

---

**NOTE:** This section was obtained entirely from the SeaWinds Science Data Product User's Manual [Dunbar et

al, 2003]. Please refer to it for more information.

## Sensor/Instrument Description:

### Collection Environment:

The SeaWinds instrument on the ADEOS-II satellite is a scatterometer that measures near-surface wind velocity over Earth's oceans. ADEOS-II (Midori-II) also carries other observation sensors:

- AMSR: NASDA's Advanced Microwave Scanning Radiometer measures physical parameters concerning water (e.g. water vapor, precipitation, sea surface temperature, sea surface wind, sea ice) by receiving weak microwave radiation from the Earth's surface and atmosphere.
- GLI: NASDA's Global Imager, an optical sensor, observes solar radiation reflected from the Earth's surface and measures physical content such as surface temperature, vegetation distribution, and ice distribution.
- ILAS-II: Environment Agency of Japan's Improved Limb Atmospheric Spectrometer-II measures the high-latitude stratospheric ozone layer, i.e. the vertical profiles of ozone, aerosols, chlorofluorocarbons, methane, nitrous oxide, and chlorine nitrate.
- POLDER: CNES's Polarization and Directionality of the Earth's Reflectances measures the polarization, directional, and spectral characteristics of the solar light reflected by aerosols, clouds, oceans, and land surfaces.

### Source/Platform:

The ADEOS-II satellite was launched into a sun-synchronous orbit on 14 December 2002.

| Nominal Orbital Parameters   |                 |
|------------------------------|-----------------|
| Altitude                     | 802.9 km        |
| Local Time at Ascending Node | 10:30 p.m.      |
| Period                       | 101.05 minutes  |
| Recurrent Cycle              | 4 days, 57 revs |
| Inclination                  | 98.62°          |

### Source/Platform Mission Objectives:

The Satellite Surface Stress Working Group mission requirements are:

| Quantity           | Requirement                  | Applicable Range  |
|--------------------|------------------------------|-------------------|
| Wind Speed         | 2 m/s (rms)                  | 3-20 m/s          |
|                    | 10%                          | 20-30 m/s         |
| Wind Direction     | 20° (rms) selected ambiguity | 3-30 m/s          |
| Spatial Resolution | 25 km                        | sigma0 cells      |
|                    | 25 km                        | Wind Vector Cells |
| Location Accuracy  | 25 km (rms)                  | Absolute          |

|                  | 10 km (rms)                     | Relative |
|------------------|---------------------------------|----------|
| Coverage         | 90% of ice-free ocean every day |          |
| Mission Duration | 36 months                       |          |

### Key Variables:

The SeaWinds instrument on ADEOS-II is an active microwave radar designed to measure electromagnetic backscatter from wind-roughened ocean surface.

### Principles of Operation:

Spaceborne scatterometers transmit microwave pulses to the ocean surface [and land and ice] and measure the backscattered power received at the instrument. The atmospheric motions themselves do not substantially affect the radiation emitted and received by the radar.

### Sensor/Instrument Measurement Geometry:

The SeaWinds instrument uses a rotating dish antenna with two spot beams that sweep in a circular pattern. The antenna radiates microwave pulses at a frequency of 13.4 GHz across broad regions on Earth's surface. The instrument will collect data over ocean, land, and ice in a continuous, 1,800-kilometer-wide band centered on the spacecraft's nadir subtrack, making approximately 1.1 million ocean surface wind measurements and covering 90% of Earth's surface each day.

SeaWinds on ADEOS-II is a conically scanning pencil-beam scatterometer. The scatterometer design used for SeaWinds is a significant departure from the fan-beam scatterometers flown on previous missions (Seasat SASS and NSCAT). SeaWinds employs a single 1-meter parabolic antenna dish with twin offset feeds for vertical and horizontal polarization. The antenna spins at a rate of 18 rpm, scanning two pencil-beam footprint paths at incidence angles of 46° (H-pol) and 54° (V-pol). The transmitted radar pulse is modulated, or "chirped", and the received pulse (after Doppler compensation) is passed through an FFT stage to provide sub-footprint range resolution. The range resolution is commandable between 2 km and 10 km, with the nominal value set at about 6 km. The nominal pulse repetition frequency is 187.5 Hz (also commandable). Each telemetry frame contains data for 100 pulses. Signal and noise measurements are returned in the telemetry for each of the 12 sub-footprint "slices." Ground processing locates the pulse "egg" and "slice" centroids on the Earth's surface. The sigma0 value is then computed for both the "egg" and the best 8 of the 12 "slices" (based on location within the antenna gain pattern).

### Manufacturer of Sensor/Instrument:

Jet Propulsion Laboratory

### Calibration:

### Specifications:

The system must measure winds between 3 and 30 m/s with an accuracy better than (the greater of) 2 m/s or 10% in speed and 20° in direction with a spatial resolution of 50 km.

The sigma0 measurement accuracy is estimated to be  $\pm 0.1$  dB.

## Frequency of Calibration:

SeaWinds generates an internal calibration pulse and associated load pulse every half-scan of the antenna. In ground processing, the load pulses are averaged over a 20-minute window, and the cal pulses over a 10-pulse (approximately 18-second) window, to provide current instrument gain calibration needed to convert telemetry data numbers into power measurements for the sigma0 calculation.

SeaWinds "programmability" includes commanding of major mode selection and range resolution, antenna spin rate and PRF, and the ability to uplink new Doppler compensation and range tracking tables as changes in the orbit occur, or to conduct special engineering tests. Mode changes will be made periodically to obtain additional calibration data.

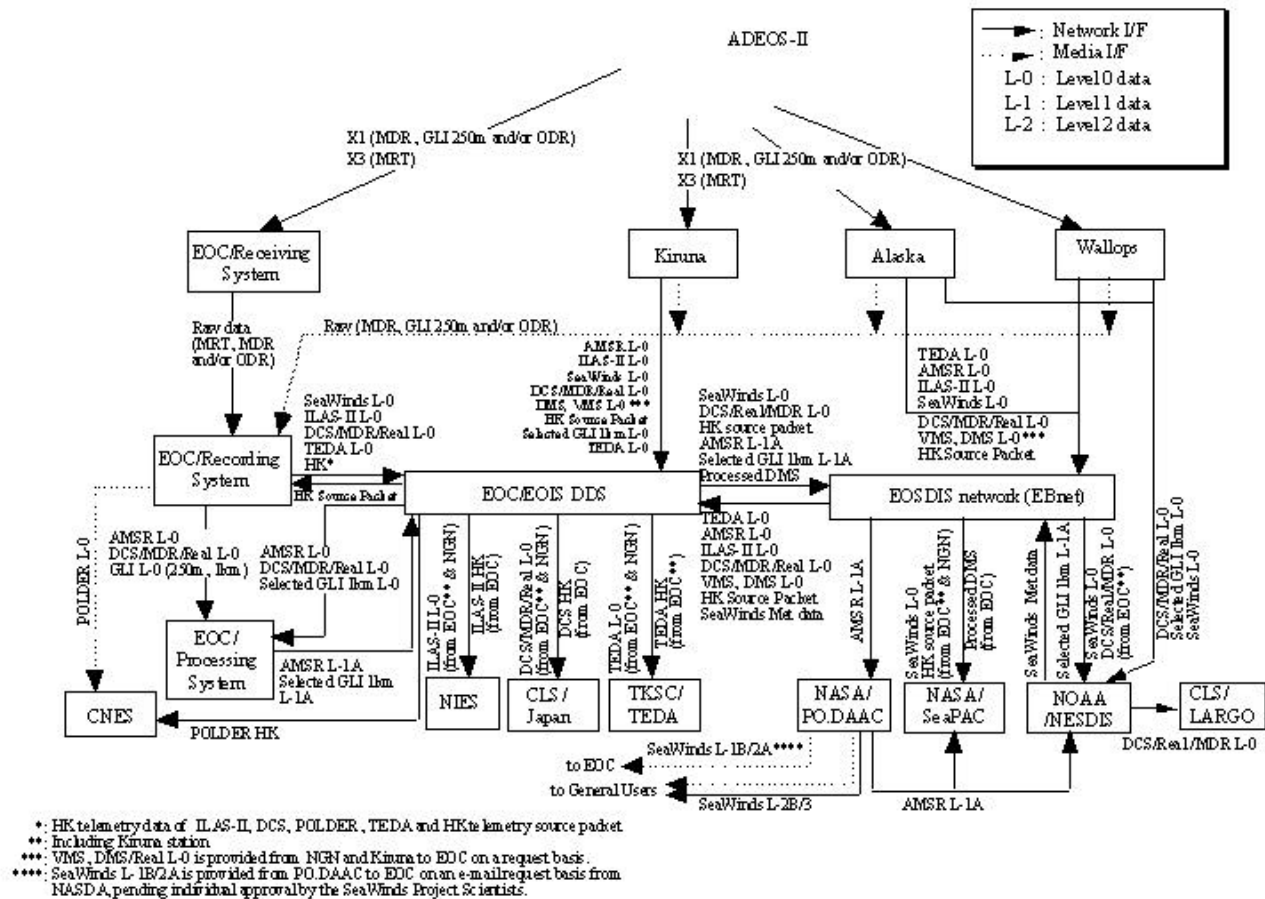
## Other Calibration Information:

Operating Modes:

- Mode 0: Wind Observation Mode Wind observation mode is the primary science mode for SeaWinds, and will be in effect more than 95% of the time.
- Mode 1: Receive-Only Mode In Receive-only mode, the transmitter is turned off while the receiver collects data at the antenna ports. This mode will be used during Cal/Val to assess radio frequency interference and internal receiver biases. No science data is returned.
- Mode 2: Continuous Calibration Mode In Continuous Calibration mode, SeaWinds performs only calibration/load cycles in place of normal pulse transmission cycles. This mode provides the most accurate receiver calibration data, and will be used periodically throughout the mission. No science data is returned.

## 5. Data Acquisition Methods:

The diagram below shows the flow of data, including SeaWinds, from the spacecraft to the sensor providers. Only the parts relevant to SeaWinds data are discussed below [NASDA, 2002].



## Receiving Systems

ADEOS-II transmits data to the receiving systems at the Earth Observation Center (EOC) in Hatoyama, Japan, the Kiruna Station in Sweden, the Alaska SAR Facility in Fairbanks, Alaska, and the Wallops Flight Facility at Wallops Island, Virginia. In a second system configuration (not shown here for simplicity), a Data Relay and Tracking Satellite relays data from the satellite to the receiving systems.

## Network Services

Both NASDA's Data Distribution System (DDS) and the Earth Observation System Data and Information System (EOSDIS) Network connect the ground segments. The two relevant data channels are:

- the SeaWinds L0 data and the housekeeping data, which flow from the receiving systems to NASA/SeaPAC
- the AMSR L1A data, sent by the EOC Processing System (after EOC receives AMSR L0 data from the receiving systems) to JPL/PO.DAAC.

## SeaWinds Processing and Analysis Center (SeaPAC)

---

**NOTE:** This section was obtained from the SeaWinds Science Data Product User's Manual [Dunbar et al, 2003]. Please refer to it for more information.

---



The SeaWinds Processing and Analysis Center (SeaPAC) at JPL is responsible for the reception of telemetry data, production and analysis of the science data products, and for delivery of the science products to the PO.DAAC for distribution. The SeaPAC consists of six principal subsystems, described in the following sections.

### **File Transfer Subsystem (FX)**

The FX subsystem is responsible for all external data transfers into the SeaPAC. These include the reception of the science telemetry data from EOC, collection of ice edge data from the National Ice Center, and collection of NWP wind field data from NCEP. While the FX software can be run manually, most of its functions are completely automated

### **Process Management Subsystem (PM)**

The PM subsystem performs the database and automatic job scheduling functions for the SeaPAC, as well as providing a user interface for the SeaPAC operator. Using a rule-based algorithm PM is able to determine when all of the necessary input data for a particular job have become available, and can start that job automatically or inform the operator that the job is ready to be run manually.

### **Preprocessor Subsystem (PP)**

The PP subsystem takes care of the initial processing of the Level 0 science telemetry, creating the basic input products for initiating the main science data processing. PP creates time correlation, ephemeris, and attitude files, creates the SeaWinds Level 0 files that are the input to the Level 1A processor, and also extracts and converts NWP data to the format needed by the Level 2B processor.

### **Level Processor Subsystem (LP)**

The LP subsystem is the heart of the science processing, implementing the conversions from Level 0 telemetry up through the Level 3 wind vector products. LP consists of five main programs, one each to produce L1A, L1B, L2A, L2B and L3 data in sequence. LP software incorporates and implements all of the science algorithms, and creates the HDF data products that are delivered to PO.DAAC and to the science community.

### **Engineering Analysis Subsystem (EA)**

The EA subsystem has the primary responsibility to monitor the instrument health and safety. EA focuses mainly on the Level 1A data to perform trend analyses on key instrument and spacecraft temperatures, voltages, and other engineering parameters.

### **Science Analysis Subsystem (SA)**

The SA subsystem performs the primary QA and data analysis functions for the SeaPAC. SA is concerned with assuring that the science algorithms as implemented in the LP are performing correctly, and making algorithm corrections and refinements as needed. SA monitors the science data quality throughout the mission. QA reports are provided with all data products.

## **Physical Oceanography DAAC**

The Physical Oceanography Distributed Active Archive Center (PO.DAAC) receives the science data

from the SeaPAC, archives the data, and distributes Level 1B, 2A, 2B and 3 data products to the SeaWinds science community, including the BYU MERS Lab. PO.DAAC also acts as the principal long-term archive for all telemetry, Level 0, Level 1A and ancillary files collected during the SeaWinds mission.

Finally, PO.DAAC receives AMSR L1A data from EOC, distributes it to SeaPAC, and arranges for its archiving.

## BYU MERS Lab

The Microwave Earth Remote Sensing Laboratory receives SeaWinds Level 1B data from PO.DAAC and uses the data to create this and other sigma0 products. The MERS Lab hosts the sigma0 products on its web site <http://www.scp.byu.edu>, as does PO.DAAC after copying them.

## 6. Observations:

### Data Notes:


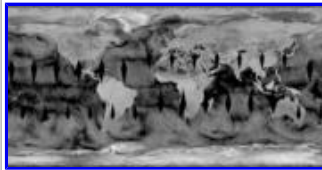

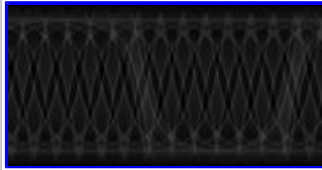




No additional notes.













### Field Notes:

No additional notes.

## 7. Data Description:

18 image products are produced per mission Julian day. The following table has all the sigma0 browse images for 10 April 2003. Click on any image for higher resolution.

| Region                           | Image Type            | Horizontal Polarization   | Vertical Polarization  |
|----------------------------------|-----------------------|---|--|
| Global:<br>all lats,<br>all lons | average<br>sigma0     |  |  |
|                                  | count                 |  |  |
|                                  | standard<br>deviation |  |  |
|                                  | average<br>sigma0     |  |  |

|   |                           |  |   |
|---|---------------------------|--|---|
|   |                           |   |   |
|   | <b>count</b>              |   |   |
|   | <b>standard deviation</b> |   |   |
| <b>Northern Hemisphere:</b><br>lats > 52.0°,<br>all lons, | <b>average sigma0</b>     |   |   |
|   | <b>count</b>              |   |   |
|   | <b>standard deviation</b> |  |  |

## Spatial Characteristics:

### Spatial Coverage:

Some areas of the Earth's surface are not covered in a single day, resulting in diamond-shaped regions of no coverage in mid-latitude and equatorial averages. The regions of no coverage are larger in the horizontal polarization images than in the vertical ones due to the narrower swath of the horizontal polarization (inner beam) measurements.

### Spatial Coverage Map:

The absolute value of a pixel in a count image indicates the number of sigma0 measurements that hit the pixel during the imaging interval. Zero indicates no data. A negative value in a pixel in a standard deviation image also indicates no data.

### Spatial Resolution:

Global images: 1800 by 900 pixels, or 0.20° by 0.20°, or 22.5 km/pixel at the equator.

Polar images (north and south): 388 by 388 pixels, or 22.5 km/pixel using a 70° reference latitude.

### Projection:

Global images: rectangular array (cylindrical equidistant).

Polar images: polar stereographic.

### Grid Description:

Two auxiliary image files are available for each region. These files contain the longitude and latitude for the center of each pixel. The files are in the same format as the product but have a latitude value or longitude value instead of a sigma0 value stored in the image.

The naming scheme for the auxiliary files is:

*QS\_XbTR3C.date*

|             |   |  |
|-------------|---|--|
| <i>T</i>    | image type                                      | 'x' = longitude<br>'y' = latitude                                      |
| <i>R</i>    | region  | 'G' = Global<br>'N' = Northern Hemisphere<br>'S' = Southern Hemisphere |
| <i>date</i> | 11-digit date of file production (yyyymmddhhmm) |  |

These files are not expected to change over the life of the mission, so only one file of each type per region is created (6 total).

Note that these files are the same as for QuikSCAT since the processing for the SeaWinds Sigma0 Browse product is identical to the processing for the QuikSCAT Sigma-0 Browse product.

### Temporal Characteristics:

#### Temporal Coverage:

Daily, from 10 April to 24 October 2003.

#### Temporal Coverage Map:

Not available.

#### Temporal Resolution:

Each image is a temporal average (or standard deviation or count) over a one-day period of all the sigma0 measurements whose centers fall within each image pixel area.

### Data Characteristics:

#### Parameter/Variable:

Each file has one image. The image types are:

1. the **average** sigma0 value
2. the **count**, i.e. the number of measurements, and
3. the normalized **standard deviation** of the measurements

**Note on Count:** The absolute value of each pixel is the number of hits in that geographic region. The sign of each pixel indicates whether the corresponding average sigma0 value in normal space (not dB) is negative.

**Variable Description/Definition:**

See the previous section.

**Unit of Measurement:**

Average sigma0 values are in dB. The count is the raw number. Standard deviation is unitless.

**Data Source:**

The sigma0 measurements come from SeaWinds Level 1B data, derived from data taken by the SeaWinds instrument on ADEOS-II.

**Data Range:**

| Image Type         | Minimum        | Maximum | No Data Indicator |
|--------------------|----------------|---------|-------------------|
| average sigma0     | -32.0          | 0.0     | -33.0             |
| count              | 0 <sup>1</sup> | 50      | -100              |
| standard deviation | 0.0            | 1.0     | -1.0              |

<sup>1</sup>The absolute value ranges from 0 to 50. See the [Note on Count](#).

**Sample Data Record:**

Each file contains 1 image; any of the full-sized images in this document is a visualization of the data in its corresponding file.

Each file also has header information. The following sample output was printed by program [sir2gif](#) as it created the [image](#) at the beginning of this document.

```
SIR file header: 'SW_XbvaG3C2003100.20032920140'
Title: 'Grid image of Globe Revs 01667-01681'
Sensor: 'SWS L1B'
Type: 'A image (SW_XbvaG3C2003100.20032920140)'
Tag: '(c) 1999 BYU MERS Laboratory'
Creator: 'BYU MERS SW_SigBrw V1.0'
Created: '18-Oct-03'
Size: 1800 x 900 Total:1620000 Offset: -33 Scale: 500
Year: 2003 JD range: 100-100 Region Number: 500 Type: 1 Form: 0
Polarization: 2 Frequency: 13.600000 MHz
Datatype: 2 Headers: 1 Ver:30
Nodata: -33.000000 Vmin: -32.000000 Vmax: 0.000000
Rectangular Lat/Long projection:
Size (deg): 360.000000 , 180.000000
Lon, Lat scale: 5.000000 , 5.000000 (pix/deg)
Offsets: -180.000000 , -90.000000
Image Min, Max: -32.000000 , 0.000000
```

**File Naming Convention:**

The naming scheme for the data files is:

*SW\_XbpTR3Cyyyyddd.date*

|          |              |                                    |
|----------|--------------|------------------------------------|
| <i>p</i> | polarization | 'h' = horizontal<br>'v' = vertical |
|----------|--------------|------------------------------------|

|             |  |  |
|-------------|--|--|
| <i>T</i>    | image type   | 'a' = average sigma0<br>'C' = count<br>'V' = standard deviation        |
| <i>R</i>    | region   | 'G' = Global<br>'N' = Northern Hemisphere<br>'S' = Southern Hemisphere |
| <i>yyyy</i> | four-digit year  |  |
| <i>ddd</i>  | three-digit day of year, from 001 to 366               |  |
| <i>date</i> | 11-digit date of file production ( <i>yyyydddhmm</i> ) |  |

The naming scheme for the [auxiliary files](#), as well as their meanings, is described above.

## 8. Data Organization:

### Data Granularity:

The basic granule is one data file. For every combination of region, image type, polarization (see [Data Description](#) above), and day, there is a data file.

A general description of data granularity as it applies to the IMS appears in the [EOSDIS Glossary](#).

### Data Format:

The BYU-MERS SIR image format was developed by the Brigham Young University (BYU) Microwave Earth Remote Sensing (MERS) laboratory to store a variety of image types along with the information required to Earth-locate the image pixels.

A SIR format file consists of one or more 512-byte headers followed by the image data and additional zero padding to insure that the file is a multiple of 512 bytes long. The file header record contains all of the information required to read the remainder of the file and the map projection information required to map pixels to lat/lon on the Earth surface. The image pixel values generally represent floating point values and may be stored in one of three ways. The primary way is as 2 byte integers (with the high order byte first), though the pixels may be stored as single bytes or IEEE floating point values. Scale factors are stored in the header to convert the integer or byte pixel values to native floating point units. The image is stored in row-scanned (left to right) order from the lower left corner (the origin of the image) up through the upper right corner. By default, the location of a pixel is identified with its lower-left corner. The origin pixel (1,1) is the lower left corner of the image. The array index  $n$  of the  $(i,j)$ th pixel where  $i$  is horizontal and  $j$  is vertical is given by

$$n = (j - 1) \times N_x + i$$

where  $N_x$  is the horizontal dimension of the image. The last pixel stored in the file is at  $(N_x, N_y)$ .

The sir file header contains various numerical values and strings which describe the image contents. For example, the value for a no-data flag is set in the header as well as a nominal display range and the minimum and maximum representable value. Optional secondary header records (512 bytes) can be used to store additional, non-standard information. The standard SIR file format supports a variety of image projections including:

1. Rectangular array (no projection)
2. Rectangular lat/lon array

3. Two different types of Lambert equal-area projections which can be used in either non-polar or polar projections
  4. Polar stereographic projections
  5. EASE grid polar projection with various resolutions
  6. EASE global projection with various resolutions
- For the SeaWinds global sigma0 browse products, only the rectangular array and polar stereographic projections are used. Also, the naming scheme for sigma0 browse products is not SIR-standard.

Any of the programs described in [Software](#) below decodes SIR headers.

## 9. Data Manipulations:

### Formulae:

### Derivation Techniques and Algorithms:

The earlier [Discussion](#) describes the general processing of SeaWinds Level 1B files into sigma0 browse images. [Data Description](#) shows the three specific types of browse images created from sigma0 measurements. They are:

- the **average**, expressed in dB of the absolute value. Computation of the average sigma0 value is done in normal space, not dB, with negative values included. If the resulting average is negative, the sign of the corresponding pixel of the count image is set to negative. In practice, negative averages occur primarily over the ocean in regions of low wind-speed. These pixels are clipped to  $\pm 32.5$  dB with -33 used to denote no available data. The reference incidence angles are approximately H-pol (inner beam)  $46^\circ$  and V-pol (outer beam)  $54^\circ$ .
- the **count**. The absolute value indicates the number of measurements which hit the pixel during the imaging interval. Negative values indicate that the corresponding average value is negative. Zero denotes no data. These images can be useful in creating multi-day averages and in quality control.
- the normalized **standard deviation** ( $K_p$ ) of the measurements hitting each grid element divided by the mean value. If the mean is negative, no estimate is made and zero is returned. A negative value indicates no data.

### Data Processing Sequence:

### Processing Steps:

The sigma0 browse products are produced from SeaWinds L1B data. Only measurements flagged as "usable" in the L1B file are included in the browse product. Overlapping swaths are averaged.

The L1B files are part of a series of level-conversion stages, starting from raw data from the SeaWinds on ADEOS-II instrument and producing more refined products at each stage. See [Related Data Sets](#). Those products are created in the following order:

1. Level 0: Science Telemetry Processing
2. Level 1A: Engineering Unit Converted Telemetry
3. Level 1B: Time-Ordered Earth-Located Sigma0s
4. Level 2A: Surface Flagged Sigma0s and Attenuations
5. Level 2B: Ocean Wind Vectors in a 25km Swath Grid

## 6. Level 3: Daily, Gridded Ocean Wind Vectors

### Processing Changes:

None at this time.

### Calculations:

### Special Corrections/Adjustments:

The header in every SIR file contains the following items to help interpret the raw pixels in the data:

- offset
- scale factor
- data type: 1-byte int, 2-byte int, or 4-byte float
- value to indicate no data

Any of the programs described in [Software](#) below decodes SIR headers.

### Calculated Variables:

Each file holds one type of data. See [Derivation Techniques and Algorithms](#).

### Graphs and Plots:

No additional information.

## 10. Errors:

### Sources of Error:

"When rain is present, measurements of the ocean surface sigma0 become contaminated for several reasons. Some of the transmitted energy is scattered back towards the scatterometer by the rain and never reaches the ocean surface. Energy backscattered from rain can constitute a significant but unknown portion of the measured echo energy. Some of the transmitted energy is scattered and/or absorbed by the rain and is never measured by the scatterometer. This has the effect of attenuating the echo energy from the ocean. Additionally, the rain roughens the ocean surface and changes its radar cross section."  
[Huddleston and Stiles, 2000]

Rain also attenuates the signal over land and ice. Generally, however, the land backscatter is larger over land/ice than over the ocean so rain is less of a problem. No correction for rain is applied in generating this or other sigma0 products.

The normalized standard deviation of sigma0, known as  $K_p$ , is computed to give an estimate of the measurement uncertainty of the backscatter. Major sources of  $K_p$  in the scatterometer system are:

1. uncertainty in the receiver noise, known as communication  $K_p$  or  $K_{pc}$
2. uncertainties in the geometric and gain parameters, known as retrieval  $K_p$  or  $K_{pr}$

Instrument processing is another source of error, as are uncertainty in attitude pointing and various bias errors. The latter two can reduce the effective resolution of the highest resolution images (in effect smearing them), but they are not considered to be important sources of error for most sigma0 image



products including this one.

Since the images are averages over time, sampling variability over the averaging period affects the reported backscatter values.

Over the ocean all backscatter measurements (from a single polarization) falling within a single pixel are averaged. Thus, the forward- and aft-looking measurements are averaged, and the resulting average is over the various azimuth angles of the measurements. The azimuth angles of the measurements hitting a given location vary with pixel location and time and may be further affected by missing or low-quality data. Discontinuities and artifacts can occur at swath edges and in areas where the surface shows significant azimuth dependence (e.g. over the ocean). The normalized [standard deviation images](#) can be useful in evaluating temporal and azimuth variation in the backscatter measurements.

## **Quality Assessment:**

### **Data Validation by Source:**

"The SA subsystem performs the primary QA and data analysis functions for the SeaPAC. SA is concerned with assuring that the science algorithms as implemented in the LP are performing correctly, and making algorithm corrections and refinements as needed. SA monitors the science data quality throughout the mission. QA reports are provided with all data products." [Dunbar et al, 2003]

The QA reports are available on the PO.DAAC FTP site  
[ftp://podaac.jpl.nasa.gov/pub/ocean\\_wind/seawinds/mission\\_status\\_report/](ftp://podaac.jpl.nasa.gov/pub/ocean_wind/seawinds/mission_status_report/).

### **Confidence Level/Accuracy Judgement:**

Not applicable.

### **Measurement Error for Parameters:**

Information not currently available.

### **Additional Quality Assessments:**

No additional notes.

### **Data Verification by Data Center:**

None.

## **11. Notes:**

### **Limitations of the Data:**

Due to the rotation of the antenna, the cross-track density of sigma0 measurements varies with more measurements at the outer edges of the swath than at the swath center (swath edges are clearly visible in the [count images](#)).

Some areas may not be covered in a single day; see [Spatial Coverage](#).

Sigma0 measurements may be contaminated when rain is present.

### Known Problems with the Data:

As a cautionary note, experience suggests that the sigma0 images contain many features which can be difficult to explain and can be misleading, in part because forward- and aft-looking measurements are combined. Comparison with the corresponding wind maps is strongly recommended.

### Usage Guidance:

None.

### Any Other Relevant Information about the Study:

None.

## 12. Application of the Data Set:

- Sea ice, especially polar
- Tropical vegetation

## 13. Future Modifications and Plans:

None.

## 14. Software:

### Software Description:

Sample read and display software for SIR files are available in C, C++, FORTRAN, FORTRAN-90, IDL/PV-WAVE, and MATLAB. These programs can be easily modified to meet the requirements of individual users.

| Language | Program Name     | Description  |
|----------|------------------|--|
| C        | sir_ez_example.c | read SIR file, print values of 4 corner pixels   |
|          | sir2byte.c       | convert SIR file to raw, unsigned byte file  |
|          | sir2gif_ez.c     | convert SIR file to GIF  |
|          | sir2gif.c        |  |
|          | sir2bmp.c        | convert SIR file to BMP  |
|          | tandemize.c      | merge QuikSCAT and SeaWinds sigma0 browse files into "tandem" SIR files                    |
| Fortran  | fsirexample_EZ.f | read SIR file, create an unsigned byte file  |
|          | fsirexample.f    |  |
|          | sir2byte.f       |  |
|          | fsir_locmap.f    | read SIR file, create latitude and longitude maps like the <a href="#">auxiliary files</a> |
|          | fsir_locmap_EZ.f |  |

|                |   |   |
|----------------|---|---|
| <b>IDL</b>     | xsir_idl.pro                            | load SIR file, save to file, display image, do forward/inverse transforms |
| <b>PV-WAVE</b> | xsir.pro, xsir_pvwave.pro               | load SIR file, save to file, display image, do forward/inverse transforms |
| <b>MATLAB</b>  | loadsir.m, writesir.m, showimage.m, ... | load SIR file, save to file, display image, do forward/inverse transforms |

IDL is made by Research Systems, Inc.

PV-WAVE is made by Visual Numerics, Inc.

MATLAB is made by The MathWorks, Inc.

All are copyrighted software tools for numerical analysis and visualization.

### Software Access:

The latest versions of the sample read and display software can be obtained via anonymous FTP from <ftp://ftp.scp.byu.edu/software/lang>, where *lang* = "c", "cpp", "f", "f90", "idl", or "matlab". JPL PO.DAAC also maintains a copy of that software at [ftp://podaac.jpl.nasa.gov/pub/ocean\\_wind/quikscat/sigma0browse/sw](ftp://podaac.jpl.nasa.gov/pub/ocean_wind/quikscat/sigma0browse/sw).

The IDL and PV-WAVE programs reside in one directory due to the similarity between the languages. `xsir_idl.pro`, `xsir.pro`, and `xsir_pvwave.pro` call the same functions, though the file `loadsir.pro` must be modified for PV-WAVE.

## 15. Data Access:

### Contact Information:

For general questions and comments regarding this dataset, please contact

**email:** [podaac@podaac.jpl.nasa.gov](mailto:podaac@podaac.jpl.nasa.gov)

**url:** <http://podaac.jpl.nasa.gov>

**phone:** (626)744-5508

**fax:** (626)744-5506

**mail:** JPL PO.DAAC User Services Office  
Jet Propulsion Laboratory

Email is the preferred method of communication.

Dr. David Long of BYU is the source of this dataset. Please contact him with more detailed questions. See [Investigator](#) for contact information.

### Data Center Identification:

Jet Propulsion Laboratory (JPL)  
Physical Oceanography Archive Center (PO.DAAC)

### Procedures for Obtaining Data:

This data set is currently available via anonymous FTP at [ftp://podaac.jpl.nasa.gov/pub/ocean\\_wind/seawinds/sigma0browse](ftp://podaac.jpl.nasa.gov/pub/ocean_wind/seawinds/sigma0browse).

This product is also available on DVD. Orders may be placed using the PO.DAAC on-line order form,

<http://podaac.jpl.nasa.gov/order>, or the Earth Observing System (EOS) Data Gateway,  
<http://poseidon.jpl.nasa.gov/~imsww/pub/imswelcome/>.

### Data Center Status/Plans:

not available

## 16. Output Products and Availability:

This data set is currently available via anonymous FTP at  
[ftp://podaac.jpl.nasa.gov/pub/ocean\\_wind/seawinds/sigma0browse](ftp://podaac.jpl.nasa.gov/pub/ocean_wind/seawinds/sigma0browse).

## 17. References:

Ashcraft, I.S. and D.G. Long, 2000. SeaWinds Views Greenland, *Proc. Int. Geosci. Rem. Sens. Sym.*, Honolulu, Hawaii, 6-10 July 2000

Dunbar, R.S. et al, October 2003. [SeaWinds Science Data Product User's Manual](#), Version 1.1, JPL Document D-21551, Jet Propulsion Laboratory, Pasadena, CA.

Huddleston, J.N. and B.W. Stiles, 2000. Multidimensional Histogram (MUDH) Rain Flag Product Description, Version 2.1, Jet Propulsion Laboratory, Pasadena, CA.

Long, D.G., 2000. [A QuikSCAT/SeaWinds Sigma0 Browse Product](#), Version 2.0, Brigham Young University, Provo, UT.

Long, D.G. and M.R. Drinkwater, 1999. Cryosphere Applications of NSCAT Data, *IEEE Trans. on Geoscience and Remote Sensing*, Vol. 37, No. 3, pp. 1671-1684

NASDA, February 2002. [Mission Operations Interface Specification Common Part](#), EOC document AD2-EOC-96-054

Remund, Q.P. and D.G. Long, 2000. Iterative Estimation of Antarctic Sea Ice Extent Using SeaWinds Data, *Proc. Int. Geosci. Rem. Sens. Sym.*, Honolulu, Hawaii, 6-10 July 2000

Remund, Q.P. and D.G. Long, 1998. Sea Ice Mapping Algorithm for QuikSCAT and Seawinds, *Proc. Int. Geosci. Rem. Sens. Sym.*, Seattle, Washington, 6-10 July, 1998, pp. 1686-1688.

## 18. Glossary of Terms:

See the [EOSDIS Glossary](#) for a more general listing of terms related to the Earth Observing System project.

## 19. List of Acronyms:

ADEOS-II: Advanced Earth Observing Satellite-II, later renamed Midori-II.

AMSR: Advanced Microwave Scanning Radiometer

CNES: Centre National d'Etudes Spatiales

EA: SeaPAC Engineering Analysis program set

EOC: Earth Observation Center in Hatoyama, Japan

EOS: Earth Observing System

EOSDIS: Earth Observing System Data and Information System

FTP: File Transfer Protocol

**FX:** SeaPAC File Transfer program set  
**HDF:** Hierarchical Data Format  
**IDL:** Interactive Data Language  
**JPL:** Jet Propulsion Laboratory  
**L1B:** SeaWinds Level 1B Product  
**L3:** SeaWinds Level 3 Product  
**LP:** SeaPAC Level Processor program set  
**NASA:** National Aeronautics and Space Administration  
**NASDA:** National Space Development Agency of Japan. Renamed JAXA, Japan Aerospace Exploration Agency  
**NCEP:** National Center for Environmental Prediction Applications  
**NSCAT:** NASA Scatterometer  
**NWP:** Numerical Weather Prediction  
**PM:** SeaPAC Process Management program set  
**PP:** SeaPAC Preprocessor program set  
**PO.DAAC:** Physical Oceanography Distributed Active Archive Center  
**QA:** Quality Assurance  
**QuikSCAT:** the NASA Quick Scatterometer spacecraft, or  
**QuikSCAT:** usually refers to the SeaWinds instrument on the spacecraft  
**SA:** SeaPAC Science Analysis program set  
**SAFS:** Standard Autonomous File Server  
**SeaPAC:** SeaWinds Processing and Analysis Center  
**URL:** Uniform Resource Locator

## 20. Document Information:

### Document Revision Date:

29 December 2003

### Document Review Date:

### Document ID:

D-20413

### Citation:

Document originally written by Richard Chen based heavily on "A QuikSCAT/SeaWinds Sigma0 Browse Product" [Long, 2000].

The sir2gif program mentioned in the [Software](#) section produced the images in this document using data from the [ftp](#) site.

### Document Curator:

PO.DAAC SeaWinds Data Team  
[sws@podaac.jpl.nasa.gov](mailto:sws@podaac.jpl.nasa.gov)

### Document URL:

[http://podaac.jpl.nasa.gov:2031/DATASET\\_DOCS/dLongSWBrw.html](http://podaac.jpl.nasa.gov:2031/DATASET_DOCS/dLongSWBrw.html)